

LITHIONICS BATTERY®

LITHIUM ION IRON PHOSPHATE BATTERY SYSTEMS



MODEL NUMBER:
GT96V75A-F24-DIN-MODULE

EXTERNAL BMS
VERSION




EXTERNAL BMS REQUIRED

**BMS SOLD SEPARATELY. SEE BMS
DATA SHEET PROVIDED BY LITHIONICS
BATTERY®.**

Item	Description	
Model	GT96V75A-F24-DIN-MODULE	
Nominal Voltage	96	
Nominal Capacity	75	
Nominal Watt Hours	7200	
Internal Resistance	<300 milliohms	
Charge		
Charging temperature range	32F/0C to 113F/45C OR -4F/-20C with Heater Kit	
Charge voltage	109.5	
Recommended float charge voltage(for standby use)	100.5	
Recommended max charge current	50	
Allowed max charge current	75	
Discharge		
Discharging temperature range	-4F/-20C to 131F/55C	
Output Voltage Range	87.0 - 100.5	
Recommended max discharge current	75	
Max discharge current	150	
Pulse discharge current (not suitable for engine cranking)	750	
Discharge cut-off voltage	NeverDie® Power Reserve at 90.0V Low Voltage Cut-Off at 87.0V	
Mechanical		
Dimensions	Length 24.0"	
	Width 13.0"	
	Height 11.1"	
Weight	Approx. 155lbs (70.3kg)	
Storage		
Storage Temperature & Humidity Range	< 1 Month	-4~95°F (-20~35°C), 45~75%RH
	< 3 Months	14~86°F (-10~30°C), 45~75%RH
Recommended storage	59~95°F (15~35°C), 45%RH~75%RH	
Long Term Storage	If the battery needs to be stored for > 3 months the voltage should be 13.2V (50%SOC), and stored at the recommended storage specifications shown above. Additionally, the battery needs at least one charge & discharge cycle every six months.	
Self-discharge rate	Residual capacity	≤3% per month; ≤15% per year
	Reversible capacity	≤1.5%per month; ≤8% per year

* Maximum charging and discharging rates apply depending upon the ambient temperature and duty cycle of the system. UL1973 tests of maximum charge and discharge current were performed at 25°C/77°F

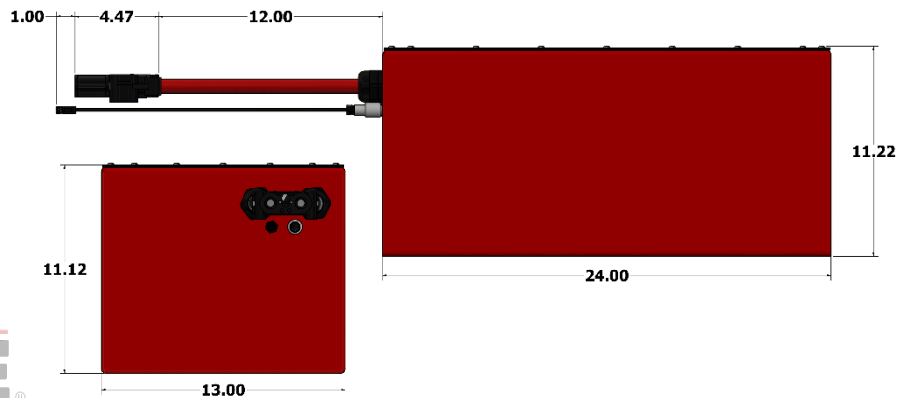

NEVERDIE®

ENERGY

75 AMP HOURS

PULSE AMPS: 750 (1 SEC)

7200 WATT-HOURS

WARNING

1. LITHIUM BATTERIES ARE NOT DESIGNED FOR CHARGING IN SUB-FREEZING TEMPERATURES. CONTACT LITHIONICS BATTERY® FOR DETAILS ON OUR COLD WEATHER PACKAGE.
2. INSTALLATION: IT IS RECOMMENDED THAT MODULES BE INSTALLED BLACK LID UP.

NOTE: CONTACT LITHIONICS BATTERY® FOR A USER INSTALLATION GUIDE & STORAGE PROCEDURES. FOLLOW THE GUIDE TO ENSURE FITNESS OF USE & WARRANTY.

**96V
GT
SERIES**