

PART NUMBER: 76-DIN6P-02 – 6 Port Combiner Box

EXTERNAL ACCESSORIES




## **SPECIFICATIONS**

The combiner box current rating is 400 amps continuous. However, the maximum current rating may be limited by the battery modules used and/or the Battery Management System rating. Please confirm the system-level maximum charge and discharge current capabilities with Lithionics Battery<sup>®</sup>.

Lithionics Battery<sup>®</sup> recommends securing the battery connectors in place to the combiner box with cable ties after installation to prevent connectors from backing out.

Note: Jumper DIN connector required for unused ports.

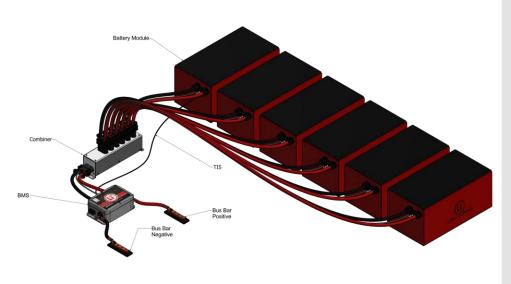

18.35 X 4.38 X 4.92 Measured in inches

DIMENSIONS

6-Port Combiner Box: 17lbs

18.348

NOTE: CONTACT LITHIONICS BATTERY® FOR A USER INSTALLATION GUIDE & STORAGE PROCEDURES. FOLLOW THE GUIDE TO ENSURE FITNESS OF USE & WARRANTY.