

# LITHIONICS BATTERY®

LITHIUM ION IRON PHOSPHATE BATTERY SYSTEMS



MODEL NUMBER:  
GT102V75A-8D-DIN-MODULE

EXTERNAL BMS  
VERSION




Item	Description
Model	GT102V75A-8D-DIN-MODULE
Nominal Voltage	102.4
Nominal Capacity	75
Nominal Watt Hours	7680
Internal Resistance	<300 milliohms
<b>Charge</b>	
Charging temperature range	32F/0C to 113F/45C
Charge voltage	116.8
Recommended float charge voltage(for standby use)	107.2
Recommended max charge current	50
Allowed max charge current	75
<b>Discharge</b>	
Discharging temperature range	-4F/-20C to 131F/55C
Output Voltage Range	92.8 - 107.2
Recommended max discharge current	75
Max discharge current	150
Pulse discharge current (not suitable for engine cranking)	750
Discharge cut-off voltage	NeverDie® Power Reserve at 96.0V Low Voltage Cut-Off at 92.8V
<b>Mechanical</b>	
Dimensions	Length 23.0" Width 13.0" Height 12.0"
Weight	Approx. 150lbs (68kg)
<b>Storage</b>	
Storage Temperature & Humidity Range	< 1 Month -4~95°F (-20~35°C), 45~75%RH < 3 Months 14~86°F (-10~30°C), 45~75%RH Recommended storage 59~95°F (15~35°C), 45%RH~75%RH
Long Term Storage	If the battery needs to be stored for > 3 months the voltage should be 13.2V (50%SOC), and stored at the recommended storage specifications shown above. Additionally, the battery needs at least one charge & discharge cycle every six months.
Self-discharge rate	Residual capacity ≤3% per month; ≤15% per year Reversible capacity ≤1.5%per month; ≤8% per year

\* Maximum charging and discharging rates apply depending upon the ambient temperature and duty cycle of the system. UL1973 tests of maximum charge and discharge current were performed at 25°C/77°F



**NEVERDIE®**

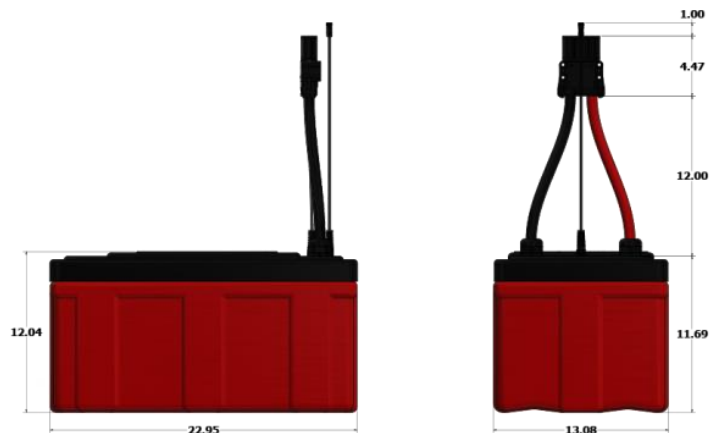

ENERGY

75 AMP HOURS

PULSE AMPS: 750 (1 SEC)

7680 WATT-HOURS

**WARNING**

1. LITHIUM BATTERIES ARE NOT DESIGNED FOR CHARGING IN SUB-FREEZING TEMPERATURES. CONTACT LITHIONICS BATTERY® FOR DETAILS ON OUR COLD WEATHER PACKAGE.
2. INSTALLATION: IT IS RECOMMENDED THAT BATTERIES BE INSTALLED CABLE OR TERMINAL SIDE UP.

NOTE: CONTACT LITHIONICS BATTERY® FOR A USER INSTALLATION GUIDE & STORAGE PROCEDURES. FOLLOW THE GUIDE TO ENSURE FITNESS OF USE & WARRANTY.

**102V**  
GT  
SERIES