

# LITHIONICS BATTERY®

LITHIUM ION IRON PHOSPHATE BATTERY SYSTEMS



MODEL NUMBER:  
12V125A-G31-5CND

INTERNAL BMS  
VERSION




## NEVERDIE®

Item	Description	
Model	12V125A-G31-5CND	
Nominal Voltage	12.8V	
Nominal Capacity	125Ah	
Internal Resistance	≤4mΩ	
Features	NeverDIE Reserve, High and Low Voltage Cutoff, High and Low Temperature Cutoff, Short Circuit Protection, <b>Bluetooth App</b>	
<b>Charge</b>		
Charging temperature range	32~113°F (0~45°C)	
Charge voltage	14.6±0.1V	
Recommended float charge voltage(for standby)	13.4±0.1V	
Recommended charge current	≤50A	
Allowed max charge current	100A with starting temp of 77°F (25°C)	
<b>Discharge</b>		
Discharging temperature range	-4~140°F (-20~60°C)	
Output Voltage Range	11.2~14.6V	
Recommended discharge current	≤80A	
Max continuous discharge current	100A with starting temp of 77°F (25°C)	
Surge discharge current	<400A for 30s max with starting temp of	
Pulse discharge current	<1000A for 1s max with starting temp of	
Reserve cut-off voltage	12.0V±0.05V	
Discharge cut-off voltage	11.2±0.1V	
<b>Mechanical</b>		
Dimensions	Length 12.5in (318mm) Width 6.5in (165mm) Height 8.46in (215mm)	
Weight	Approx. 33.4lbs (15.1Kg)	
<b>Storage</b>		
Storage Temperature & Humidity Range	< 1 Month	-4~95°F (-20~35°C), 45~75%RH
	< 3 Months	14~86°F (-10~30°C), 45~75%RH
	Recommended storage	59~95°F (15~35°C), 45%RH~75%RH
Long Term Storage	If the battery needs to be stored for > 3 months the voltage should be 13.2V (50%SOC), and stored at the recommended storage specifications shown above. Additionally, the battery needs at least one charge &	
Self-discharge rate	Residual capacity	≤3% per month; ≤15% per year
	Reversible capacity	≤1.5%per month; ≤8% per year

### INTERNAL NEVERDIE® COMPACT SERIES FEATURES

miniBMS® Cell/Module Sensors and Microprocessors with Automatic Cell Balancing  
 NeverDie® Power Reserve (Spare Fuel) for Hotel Loads and Worry-Free Power for Engine Cranking  
 Over-Charge, Over-Discharge and Short-Circuit Protection (LVC, HVC, SCC)  
 Pushbutton Storage Operation

Available Optional Bluetooth: Monitor Battery Voltage, State-of-Charge, Temperature, Current & Status Code remotely from your mobile device. Available for download on [Google Play](#) & [Apple App Store](#).

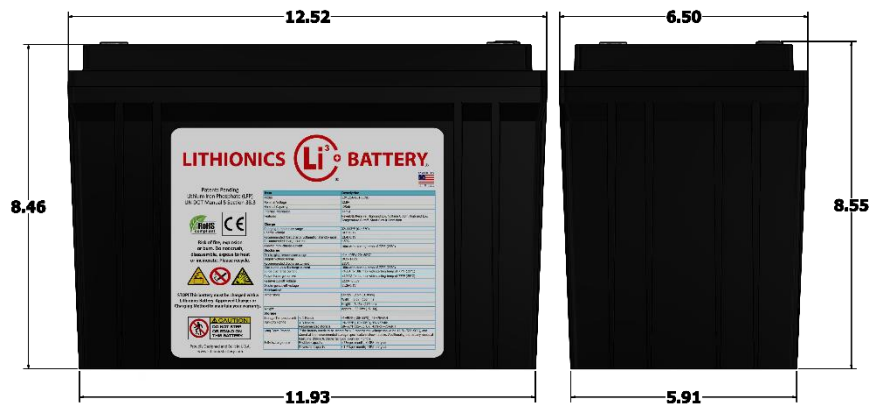

ENERGY

625 CRANKING AMPS

PULSE AMPS: 1000 (1 SEC)

1600 WATT-HOURS

### WARNING

1. LITHIUM BATTERIES ARE NOT DESIGNED FOR CHARGING IN SUB-FREEZING TEMPERATURES. CONTACT LITHIONICS BATTERY® FOR DETAILS ON OUR COLD WEATHER PACKAGE.
2. INSTALLATION: IT IS RECOMMENDED THAT BATTERIES BE INSTALLED CABLE OR TERMINAL SIDE UP.

NOTE: CONTACT LITHIONICS BATTERY® FOR A USER INSTALLATION GUIDE & STORAGE PROCEDURES. FOLLOW THE GUIDE TO ENSURE FITNESS OF USE & WARRANTY.

# 12V ENERGY SERIES