

LITHIONICS BATTERY®

LITHIUM ION IRON PHOSPHATE BATTERY SYSTEMS



MODEL NUMBER:
GT92.8V75A-F24-DIN-MODULE

EXTERNAL BMS
VERSION



EXTERNAL BMS REQUIRED


BMS SOLD SEPARATELY. SEE BMS
DATA SHEET PROVIDED BY LITHIONICS
BATTERY®.

Item	Description
Model	GT92.8V75A-F24-DIN-MODULE
Nominal Voltage	92.8V
Nominal Capacity	75
Nominal Watt Hours	6960
Internal Resistance	<300 milliohms
Charge	
Charging temperature range	32F/0C to 113F/45C OR -4F/-20C with Heater Kit
Charge voltage	104.4
Recommended float charge voltage(for standby use)	97.2
Recommended max charge current	50
Allowed max charge current	75
Discharge	
Discharging temperature range	-4F/-20C to 131F/55C
Output Voltage Range	84.1 - 97.2
Recommended max discharge current	75
Max discharge current	150
Pulse discharge current (not suitable for engine cranking)	750
Discharge cut-off voltage	NeverDie® Power Reserve at 87.0V Low Voltage Cut-Off at 84.1V
Mechanical	
Dimensions	Length 24.0" Width 13.0" Height 11.1"
Weight	Approx. 155lbs (70.3kg)
Storage	
Storage Temperature & Humidity Range	< 1 Month -4~95°F (-20~35°C), 45~75%RH < 3 Months 14~86°F (-10~30°C), 45~75%RH Recommended storage 59~95°F (15~35°C), 45%RH~75%RH
Long Term Storage	If the battery needs to be stored for > 3 months the voltage should be 95.7V (50%SOC), and stored at the recommended storage specifications shown above. Additionally, the battery needs at least one charge & discharge cycle every six months.
Self-discharge rate	Residual capacity ≤3% per month; ≤15% per year Reversible capacity ≤1.5%per month; ≤8% per year

* Maximum charging and discharging rates apply depending upon the ambient temperature and duty cycle of the system.
UL1973 tests of maximum charge and discharge current were performed at 25°C/77°F



NEVERDIE®

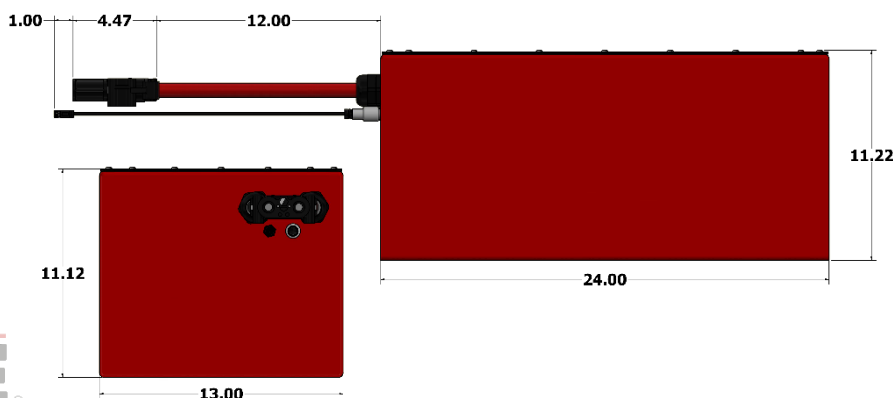

ENERGY

75 AMP HOURS

PULSE AMPS: 750 (1 SEC)

6960 WATT-HOURS

WARNING

1. LITHIUM BATTERIES ARE NOT DESIGNED FOR CHARGING IN SUB-FREEZING TEMPERATURES. CONTACT LITHIONICS BATTERY® FOR DETAILS ON OUR COLD WEATHER PACKAGE.
2. INSTALLATION: IT IS RECOMMENDED THAT MODULES BE INSTALLED BLACK LID UP.

NOTE: CONTACT LITHIONICS BATTERY® FOR A USER
INSTALLATION GUIDE & STORAGE PROCEDURES. FOLLOW THE
GUIDE TO ENSURE FITNESS OF USE & WARRANTY.

92.8V

GT
SERIES